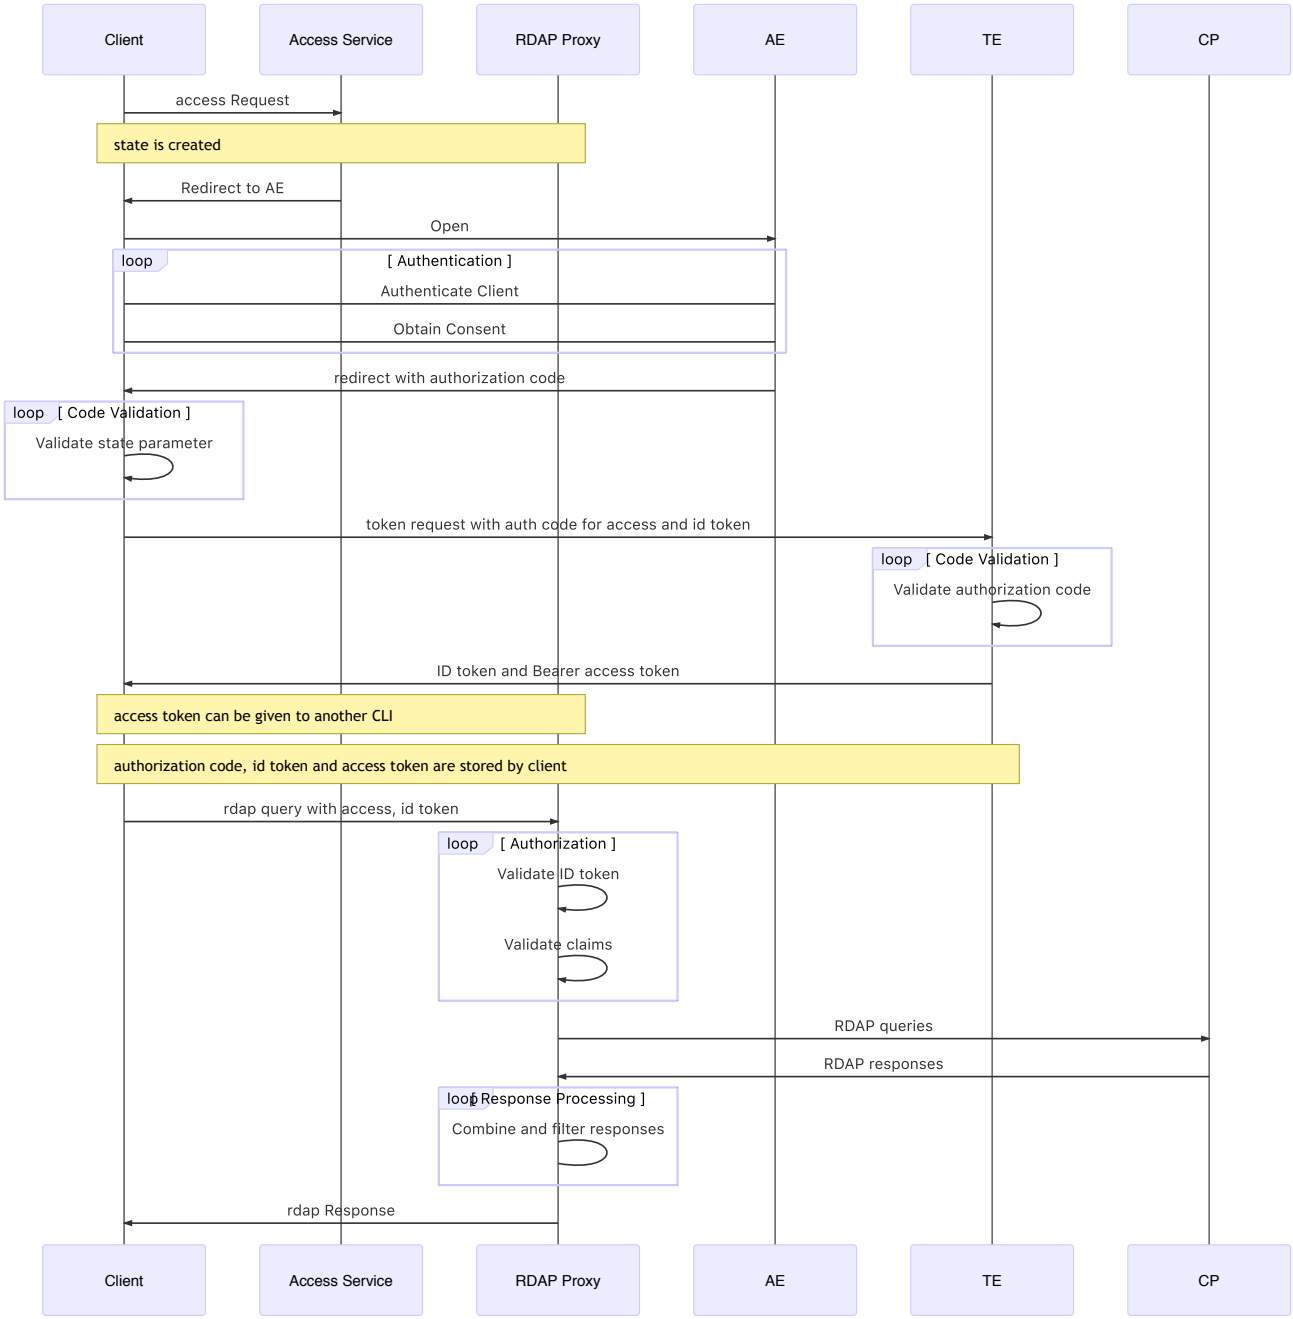
Client
Access Service
RDAP Proxy
AE
TE
CP
access Request
state is created
Redirect to AE
Open
loop
[Authentication]
Authenticate Client
Obtain Consent
redirect with authorization code
loop
[Code Validation]
Validate state parameter
token request with auth code for access and id token
loop
[Code Validation]
Validate authorization code
ID token and Bearer access token
access token can be given to another CLI
authorization code, id token and access token are stored by client
rdap query with access, id token
loop
[Authorization]
Validate ID token
Validate claims
RDAP queries
RDAP responses
loop
[Response Processing]
Combine and filter responses
rdap Response
Client
Access Service
RDAP Proxy
AE
TE
CP